


# M/MONIT 2.x

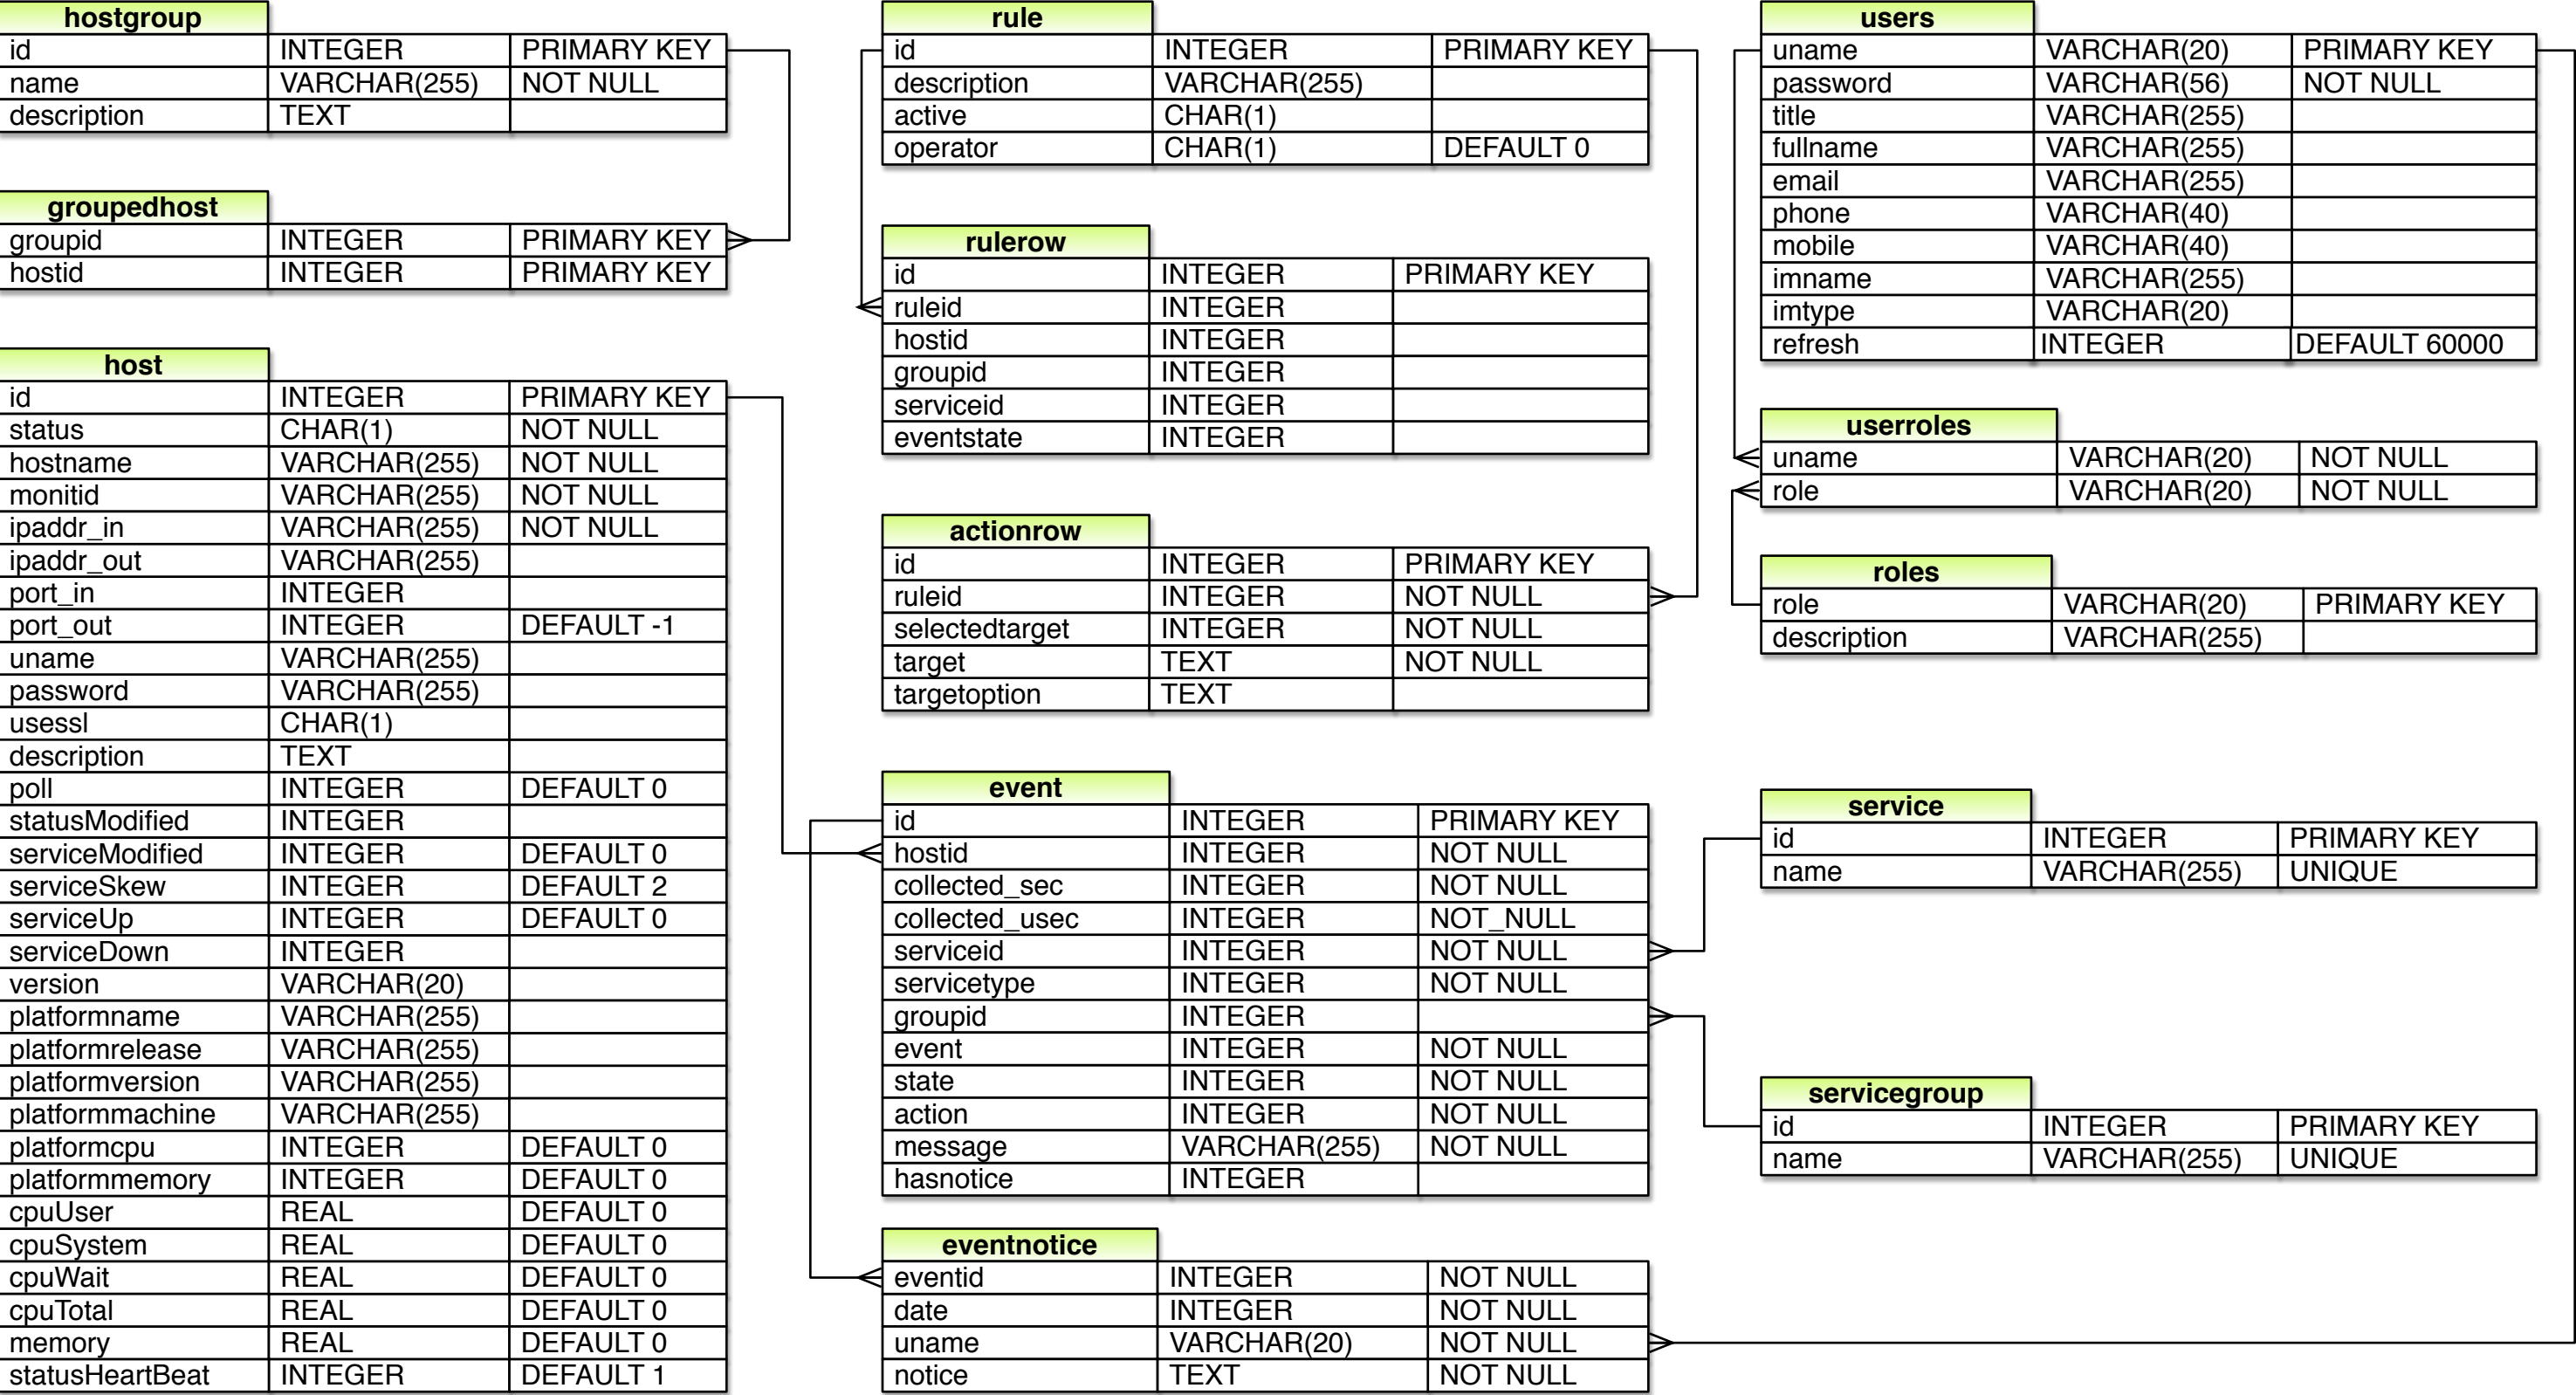

# M/MONIT 2.x

Message tables

mailserver		
id	INTEGER	PRIMARY KEY
hostname	VARCHAR(255)	NOT NULL
port	INTEGER	NOT NULL
uname	VARCHAR(255)	
password	VARCHAR(255)	
usessl	CHAR(1)	
isdefault	CHAR(1)	

jabberserver		
id	INTEGER	PRIMARY KEY
hostname	VARCHAR(255)	NOT NULL
port	INTEGER	NOT NULL
uname	VARCHAR(255)	
password	VARCHAR(255)	
isdefault	CHAR(1)	

messageformat		
id	INTEGER	PRIMARY KEY
description	VARCHAR(255)	
messagefrom	VARCHAR(255)	
subject	VARCHAR(255)	
message	TEXT	
isdefault	CHAR(1)	

messagequeue		
deferredsize	INTEGER	
retry	INTEGER	
minbackoff	INTEGER	
maxbackoff	INTEGER	
flush	INTEGER	

Persistent SESSION tables

session		
id	VARCHAR(65)	PRIMARY KEY
context	VARCHAR(255)	NOT NULL
ctime	INTEGER	NOT NULL
atime	INTEGER	NOT NULL
itime	INTEGER	NOT NULL
authtype	VARCHAR(20)	
principal	VARCHAR(255)	
data	BLOB	

Persistent Alert message queue tables

message		
id	INTEGER	PRIMARY KEY
messagefrom	VARCHAR(255)	
messagesubject	VARCHAR(255)	
messagetype	INTEGER	
messagebody	TEXT	

messagerecipients		
id	INTEGER	
messageto	VARCHAR(255)	